



**cromox**<sup>®</sup>

PREMIUM BRAND OF KETTEN WÄLDER GMBH



## Chain Hoist **CCH**

Grade 60, AISI 316L / AISI 318LN Duplex, tested  
1 fall [CCH-63, CCH-100], 2 fall [CCH-200], 3 fall [CCH-300]



**LIFTING SERIES**

The cromox<sup>®</sup> stainless steel chain hoists are specially designed for the most demanding industrial applications and offer solutions for a wide range of requirements.

## PRODUCT BENEFITS

- + High corrosion resistance thanks to high quality materials
- + Patented sealing system creates sealed brake and gear unit suitable for cleanroom use
- + Swivable upper hook locked under load
- + Load hook: easy rotation under full load
- + Fully stainless exterior, load/hand chain and pocket wheels
- + Different attachment points and endfittings available
- + Low headroom version available

### Technical data:

- + Load capacity: 0.63 t, 1.0 t, 2.0 t and 3.0 t
- + Standard features:
  - Lifting height: 3 m
  - CCH-63: CHK-6.3x19.1
  - CCH-100/-200/-300: CHK-7.1x21.2
  - Hand chain: 1.5 m, NHC-5x25
- + Customized chain lengths available on request

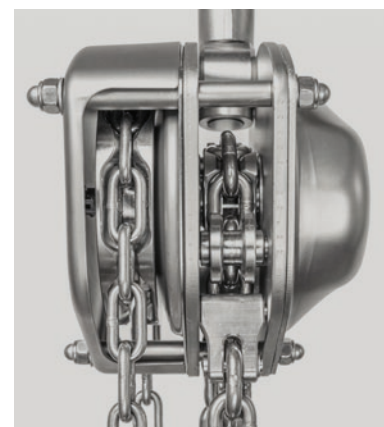


Fig.: CCH-200,  
versions vary

cromox<sup>®</sup> products are developed and manufactured by Ketten Wälde GmbH, headquartered in Germany.

The cromox<sup>®</sup> stainless steel range of products use the highest levels of design, materials, and manufacturing processes to produce the best performing products for use in the harshest environments. Ketten Wälde GmbH is Lloyds Register approved manufacturer with LR certified proofing laboratory. The stringent testing procedures ensure cromox<sup>®</sup> products are manufactured to the highest quality.

Ketten Wälde's full membership at LEEA guarantees consistently high standards of quality and safety.

Made in Germany

KETTEN WÄLDER GMBH | IM GEWERBEGEBIET 5 | 83093 BAD ENDORF | GERMANY  
+49 (0)8053 2029-0 | INFO@KETTEN-WAELDER.DE | KETTEN-WAELDER.DE





**cromox**<sup>®</sup>

PREMIUM BRAND OF KETTEN WÄLDER GMBH

Type	WLL (t)	Dimensions (mm)				Test weight (kg)	Lifting height (m)	Load chain	Hand chain	Weight (kg, approx.)
		a min.	b	c	d					
CCH-63	0.63	375	150	150	150	945	3	CHK-6.3x19.1	NHC-5x25	6.1
CCH-100	1.00	375	150	150	150	1,500	3	CHK-7.1x21.2	NHC-5x25	6.3
CCH-200	2.00	560	175	150	150	3,000	3	CHK-7.1x21.2	NHC-5x25	7.7
CCH-300	3.00	560	245	150	150	4,545	3	CHK-7.1x21.2	NHC-5x25	11

Ambient temperature: -40 to +60 °C

Application in corrosive environment possible

Maximum relative humidity: 100 %

Application in ex zone after consultation with manufacturer

Tested acc. to DIN EN 13157

#### Material Chain Hoist

Load chain AISI 316L

Hand chain AISI 316L

Housing AISI 316L

Pocketwheel load chain AISI 318LN Duplex

Pocketwheel hand chain AISI 316L

Screws AISI 318LN Duplex

Nuts AISI 304

#### Material Swivel Load Hook

Body AISI 318LN Duplex

Safety latch AISI 318LN Duplex

Spring AISI 301

Bolt AISI 318LN Duplex

Half shells AISI 318LN Duplex

Screws/nuts AISI 318LN Duplex

Safety pin AISI 301

Ball bearing AISI 440C

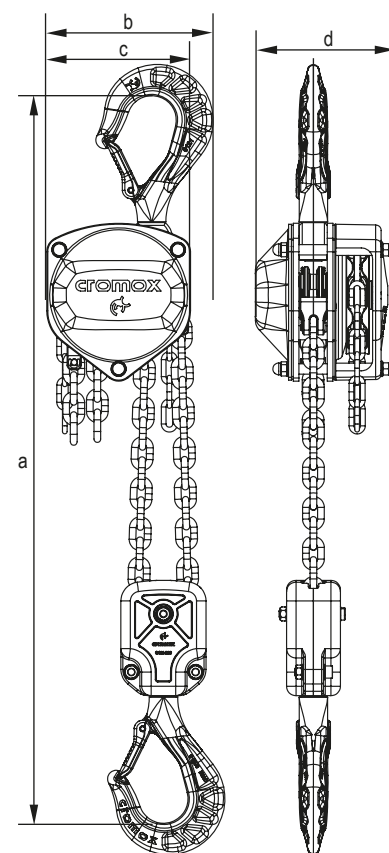


Fig.: CCH-200, versions vary

Made in Germany

KETTEN WÄLDER GMBH | IM GEWERBEGEBIET 5 | 83093 BAD ENDORF | GERMANY  
+49 (0)8053 2029-0 | INFO@KETTEN-WAELDER.DE | KETTEN-WAELDER.DE

